


AK系列支撑座(方型固定侧)

■部件详情

编号/Part No.	部件名 / Part name	数量/Qty
1	轴承座本体 / Housing	1
2	轴承 / Bearing	1组 / set
3	压板 / Holding lid	1
4	间隔圈 / Collar	2
5	轴封 / Seal	1
6	锁紧螺母 / Lock nut	1组 / set
7	内六角止付螺母 Hexagon socket-head screws	2



■AK系列尺寸图

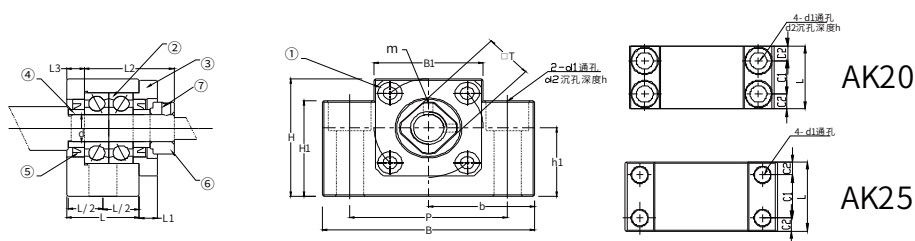

■AK系列选型参数表

单位 /Unit:mm

型号 Model No.	轴径 Shaft diameter d	L	L1	L2	L3	B	H	h	B1	H1	P	d1	d2	ℓ	M (细牙螺纹)	T	油封适用轴径
AK6	6	20	—	22.5	3.5	42	25	13	18	20	30	5.5	9.5	11	M6X0.75	12	—
AK8	8	23	—	26	4	52	32	17	25	26	38	6.6	11		M8X1.0	14	10 11.54
AK10	10	24	6	29.5	6	70	40	22	36	32	52	9	14		M10X1.0	17	14 12 14
							43	25		35						M12X1.0	19
AK12	12						41	23		33							
							43	25		35							
AK15	15	25	6	38	5	80	46	26	41	36	60	11	17	15	M15X1.0	22	20
							48	28		38							
AK20	20	42	10	52	10	95	58	*30		56	45	75			M20X1.0	30	25
AK25	25	48	13	59	14	105	68	35	66	25	85	11	—	—	M25X1.5	35	31

备注 (Note):

- C7级使用 (6字头) 深沟球轴承轴向至大间隙0.005-0.01mm。(The use of C7(prefix 6) deep groove ball bearing maximum axial clearance of 0.005-0.01mm.)
- C5级使用 (7字头) 角接触轴承经预压处理, 轴向0间隙。(The use of C5(prefix 7) by preloading angular contact bearings, axial clearance 0.)
- 轴承采用国产品牌, 采用DF组装至适宜滚珠丝杆使用。(The bearing is made of German brand, which is assembled by DF.)


AF系列支撑座(凸型支撑侧)

■部件详情

编号/Part No.	部件名 / Part name	数量/Qty
1	轴承座本体 / Housing	1
2	轴承 / Bearing	1组 / set
3	C型扣环 / Snap ring	1



■AF系列尺寸图

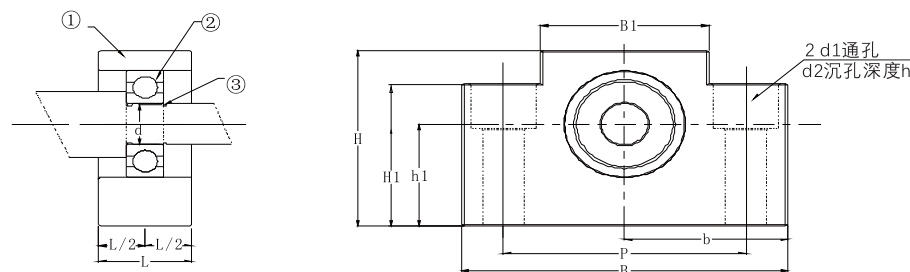

■AF系列选型参数表

单位 /Unit:mm

型号 Model No.	轴径 Shaft diameter d1	L	B	H	b ±0.02	h ±0.015	B1	H1	P	X	Y	Z	使用轴承 Bearing	使用扣环 Snapping	重量 Weight (kg)
AF10	8	20	70	43	35	25	36	35	52	9	14	11	608ZZ	S 08	0.37
AF12	10	20	70	43	35	25	36	35	52	9	14	11	6000ZZ	S 10	0.37
AF15	15	20	80	49	40	30	41	40	60	9	14	11	6002ZZ	S 15	0.45
AF20	20	26	95	58	47.5	30	56	45	75	11	17	15	6204ZZ	S 20	0.75
AF25	25	30	105	68	52.5	35	66	25	85	11	—	—	6205ZZ	S 25	0.95

备注 (Note):

- C7级使用 (6字头) 深沟球轴承轴向至大间隙0.005-0.01mm。(The use of C7(prefix 6) deep groove ball bearing maximum axial clearance of 0.005-0.01mm.)